

# **Evolution<sup>™</sup> Series** Floor Boxes

# Evolution<sup>™</sup> Series – The Next Generation of Floor Boxes

Wiremold<sup>®</sup> Evolution<sup>™</sup> Series Floor Boxes are the latest advancement in the most complete and innovative line of floor solutions in the industry.

In addition to a unique design that allows the same floor box to be used in multiple floor applications, high capacity and multi-functional capabilities make Evolution Series Floor Boxes ideal for areas where large capacity audio/video, power and communication services are needed. Ranging in size from 6- to 10gangs of capacity, these boxes have completely finished interiors with removable modules that provide easy access for reconfiguring services. Evolution Series Floor Boxes are an ideal option for installations where services are constantly evolving, such as commercial offices, conference rooms, stages, and entertainment venues.



New Evolution Series Floor Boxes provide increased capacity options and a variety of innovations not available in any other floor boxes.

Concrete Floors

### FEATURES & BENEFITS

#### One box many applications.

Evolution Series Floor Boxes are designed to work in concrete, raised and wood floor applications and are fully adjustable both pre- and post-concrete pour. A single box can be specified for multiple floor types without having to order additional components or accessories.

### ■ Configurable with removable modules.

In addition to having removable dividers and a tunnel feature that allows all compartments to be connected, the modules are removable through the top or back of the floor box. This allows for easier installations and facilitates moves, adds and changes without having to disconnect services, saving time and money.

### Audio/Video Design.

**Evolution Series Floor** Boxes have been developed specifically with the A/V industry in mind. With 3 1/2" - 3 7/8" [89mm x 98mm] of wiring



capacity behind each device plate, these boxes will accept devices from leading A/V manufacturers including Extron® Electronics and Crestron®.







**Raised Floors** 

Wood Floors



#### Durable 180° articulating hinge.

Hinge design enables covers to open a full 180° and lie flat on the floor surface with the durability to support a large cover. Provides easy access to all

interior modules and activations while reducing tripping hazards.



### FEATURES & BENEFITS (continued)

#### Auto-close egress doors.

Cable egress doors lock in position when open, and automatically closes around wires to protect cabling and reduce trip hazards.

## Accepts standard size wall plates.

Evolution Series Floor Boxes accept industry standard single-, double- and triplegang wall plates from industry leading manufacturers.





#### Multiple size knockouts.

All Evolution Series Floor Boxes are available with multiple trade size knockouts ranging in size from 3/4" to 2" allowing for multiple activations and wiring configurations.



#### Die cast aluminum cover assemblies.

Evolution Series Floor Box Covers have been designed to work on multiple floor surfaces and are manufactured from die cast




aluminum to provide strength and style. Decorative powder coat colors (black, brass, bronze, gray and nickel) will complement any room décor.

### Finished interior.

Fully finished interior removes the unfinished industrial look while increasing visibility, making it easier to see where to plug in devices.





6- to 10-gangs of capacity to accommodate power, communications, and A/V devices. A minimum of 5" [127mm] of space between devices providing ample space for hand access when plugging and unplugging into the devices.

### Fire Classified.

Evolution Floor Box has been designed to maintain the fire rating of the floor for up to 2 hours.



### Suitable for use in air handling spaces.

In accordance with Sec 300-22(c) of the National Electric Code.

### Meets ADA Accessibility Guidelines.

Trim flange is designed to meet the ADA Accessibility Guidelines as it pertains to ADA Standard 4.5, which addresses the change in floor and ground surface levels.

#### Cable Management.

Allows multiple cables to be organized and controlled for easier cable egress.



#### Furniture Feed.

Designed to be installed in concrete, raised and wood floors. Provides large capacity feeds (up to 2"). Trade size knockouts for power, communications and A/V devices.



 Bare (polished) concrete and terrazzo applications.

Evolution Series Floor Box has been designed to be installed into bare (polished) concrete and terrazzo floors.




### ■ TopGuard<sup>™</sup> Protection.

Evolution Series Floor Box covers meet and exceed UL scrub water exclusion requirements for tile, carpet, wood, bare concrete and terrazzo floor coverings.

UL Listed and Fire Classified to U.S. and Canadian safety standards.

UL Classified to maintain the integrity of 2-hour fire rated floor structures.

### **Evolution Series Floor Box Included Components**

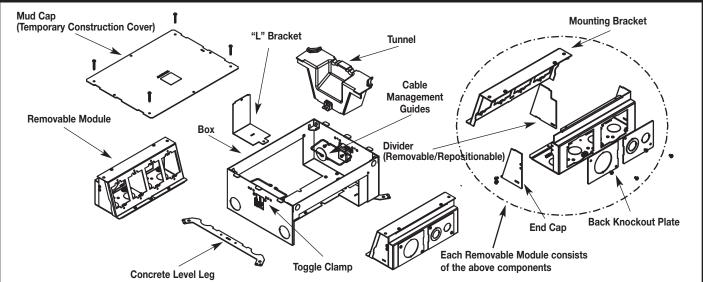


Note:	All items	shown	above a	re included	with	<b>Evolution</b>	Series	Floor Boxes.
HOLC.	Anticinis	3110 4411	above a	ne monucu	AAICII	LVOIUUOII	001103	1 1001 D0x03.

<b>Evolution Series</b>	Floor Bo	ox Model	Selectio	on Guide							
EVOLUTION FLOOR BOX MODEL	EFB6S	EFB6S-OG	EFB6S-FC	EFB8S	EFB8S-OG	EFB8S-FC	EFB10S	EFB10S-OG	EFB10S-FC	EFBFF	EFBFF-OG
INSTALL FLOOR TYPE: Concrete Floor Raised Floor Wood Floor	YES YES YES	YES	YES	YES YES YES	YES	YES	YES YES YES	YES	YES	YES YES YES	YES
BOX TYPE:	Standard	On-Grade	Fire Classified	Standard	On-Grade	Fire Classified	Standard	On-Grade	Fire Classified	Furniture Feed	Furniture Feed
BOX CAPACITY:	6-Gangs	6-Gangs	6-Gangs	8-Gangs	8-Gangs	8-Gangs	10-Gangs	10-Gangs	10-Gangs	2-Gangs	2-Gangs
DEPTH BEHIND PLATES:	3 7/8" [98mm]	3 7/8" [98mm]	3 7/8" [98mm]	3 1/2" [89mm]	3 1/2" [89mm]	3 1/2" [89mm]	3 1/4" [81mm]	3 1/4" [81mm]	3 1/4" [81mm]	N/A	N/A
REMOVABLE MODULES:	YES	YES	YES	YES	YES	YES	YES	YES	YES		
DEVICE PLATE SIZE:	Uses Standard Size Device Plates: Single-Gang (2 3/4" x 4 1/2") [70mm x 114mm]Uses Standard Size Device Plates: Single-Gang (2 3/4" x 4 1/2") Double-Gang (4 9/16" x 4 1/2") Triple-Gang (6 3/8" x 4 1/2")Uses non-standard size Device Plates (4.652" x 2.302") [117mm x 58mm]										
COVERS: COLORS:	EFB610CTC Series, EFB610BTC Series, EFB610CT Series, EFB610BT Series Black, Gray, Brass, Nickel, Bronze								Black, Gr Nickel,	Series ay, Brass, Bronze, Aluminum	
FLOOR SURFACE:	Carpet, Tile, Wood, Bare (Polished) Concrete & Terrazzo										
KO SIZE RANGE: (Trade Size)	3/4" to 2"	3/4" to 1 1/4"	1 1/4"	3/4" to 2"	3/4" to 2"	1 1/4"	3/4" to 2"	1" to 2"	1 1/4"	1/2" to 2"	1/2" to 2"
FIRE RATING: (Hours)			Up to 2 Hours			Up to 2 Hours			Up to 2 Hours		
NOTES:	Covers open full 180°, Slide cable egress doors, Painted interior										

Evolution Series Floor Box Compartment Volumes							
MODEL	OUTER COMPA	RTMENTS (Each)	CENTER COMPARTMENTS (Each)				
EFB6 Series	32 in. <sup>3</sup>	[524ml]	38.5 in. <sup>3</sup>	[630ml]			
EFB8 Series	27.5 in. <sup>3</sup>	[450ml]	34 in. <sup>3</sup>	[557ml]			
EFB10 Series	23.5 in. <sup>3</sup>	[385ml]	27.5 in. <sup>3</sup>	[450ml]			
EFBFF Series	64.5 in. <sup>3</sup>	[1056ml]	64.5 in. <sup>3</sup>	[1056ml]			

### **Evolution Series EFB6 Floor Box Ordering Information**

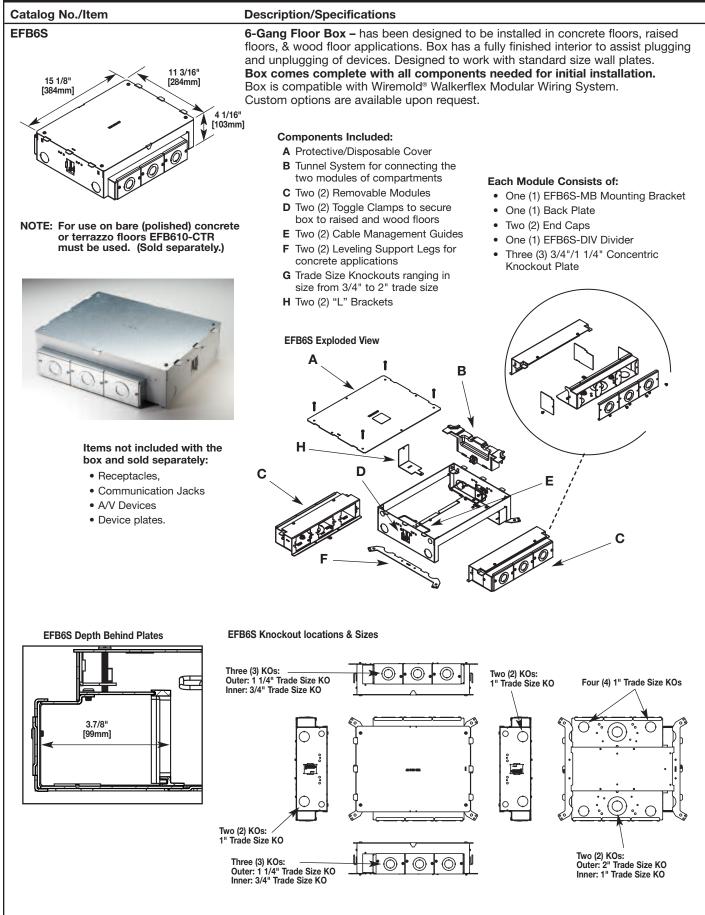


### **Evolution Series EFB6 Floor Box Ordering Information**



### **Description/Specifications**

EFB6S-OG 6-Gang Floor Box – has been designed to be installed in both on-grade and above grade concrete floor applications. Box has an epoxy coating that allows the box to be placed in on-grade applications without the need for additional vapor barriers. Designed to work with standard size wall plates. Box comes complete with all 11 3/16" 15 1/8" [384mm] components needed for initial installation. Custom options are available upon [284mm] request. 4 1/16" **Components Included:** [103mm] A Protective/Disposable Cover B Tunnel System for connecting the two modules of compartments 60 C Two (2) Removable Modules D Two (2) Cable Management Guides Each Module Consists of: E Two (2) Leveling Support Legs for • One (1) EFB6S-MB Mounting Bracket concrete applications • One (1) Back Plate NOTE: For use on bare (polished) concrete F Trade Size Knockouts ranging in One (1) EFB6S-DIV Divider or terrazzo floors EFB610-CTR size from 3/4" to 2" trade size must be used. (Sold separately.) EFB6S-OG Exploded View V Δ R Items not included with the box and sold separately: С · Receptacles, • Communication Jacks • A/V Devices С · Device plates. Е **EFB6S-OG Knockout locations & Sizes** EFB6S-OG Depth Behind Plates Three (3) KOs: Outer: 1 1/4" Trade Size KO Inner: 3/4" Trade Size KO Six (6) KOs: Two (2) KOs:  $\bigcirc$  $\bigcirc$  $\bigcirc$ 1" Trade Size KO Trade Size KO 1" Æ  $\bigcirc$ n 3 7/8" [99mm] • • • • 0 Two (2) KOs: 1" Trade Size KO Three (3) KOs: Outer: 1 1/4" Trade Size KO Inner: 3/4" Trade Size KO  $\bigcirc$  $\bigcirc$  $\bigcirc$ 

### Evolution Series EFB6 Floor Box Ordering Information (continued)



NOTE: For use on bare (polished) concrete or terrazzo floors EFB610-CTR must be used. (Sold separately.)



#### **Description/Specifications**

**6-Gang Fire Classified Floor Box** – has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is classified to be used in 2-hour fire rated floors. Designed to accept standard size wall plates. Box comes complete with all components needed for initial installation.

NOTE: Designed for new construction applications.


NOTE: Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer.

#### **Components Included:**

- Protective/Disposable Cover
- Tunnel System for connecting the two modules of compartments
- Fire Classified Pan
- Two (2) Removable Modules
- Four (4) 1 1/4" Intumescent
- Conduit Feeds
- Two (2) Cable Management Guides,


## Items not included with the box and sold separately:

- Receptacles,
- Communication Jacks
- A/V Devices
- Device plates.

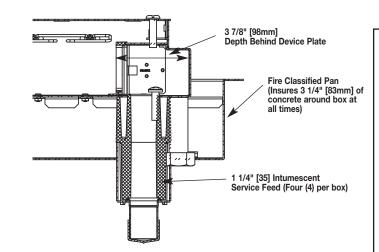


#### Outlet Boxes and Fittings Classified for Fire Resistance Legrand/Wiremold (R8209)


Type EFB6S-FC, EFB8S-FC and EFB10S-FC preset electrical insert for use in 2-hour fire rated D900 Series Floor-Ceiling designs constructed with nominal 2" or 3" deep fluted steel floor units having a nominal 5" wide valley and crests spaced 12" OC, with a minimum 3 1/4" [83mm] thickness of structural concrete topping. The assembly preset electrical insert with floor plate kit and service activations fitting will not reduce the 2-hour fire rating of the floor assembly when installed in accordance with the installation instructions accompanying the preset electrical insert and when the preset electrical insert are spaced 2' [0.61m] OC with not more than one unit per 4 square feet [0.37m<sup>2</sup>] of floor area in each span.

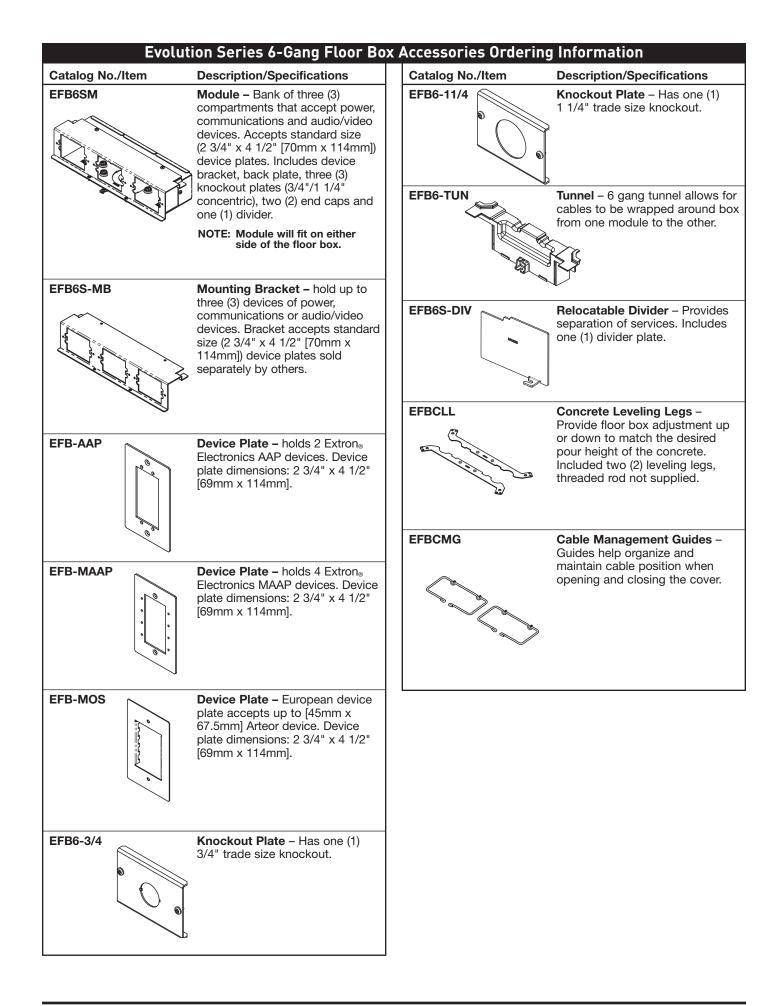


### **Evolution Series EFB8 Floor Box Ordering Information**

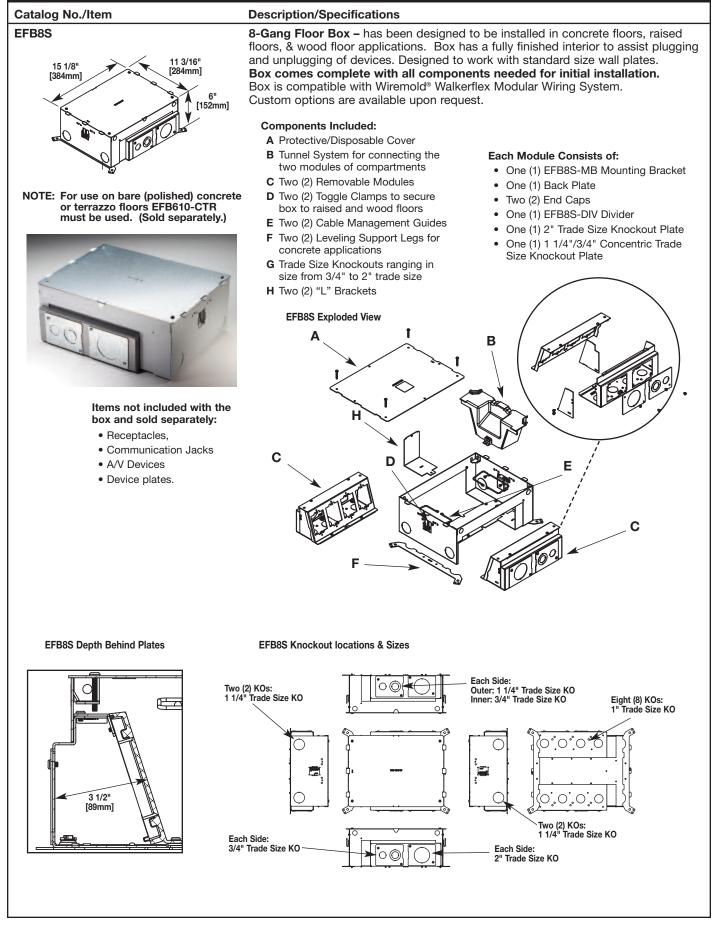


### **Evolution Series EFB8 Floor Box Ordering Information**

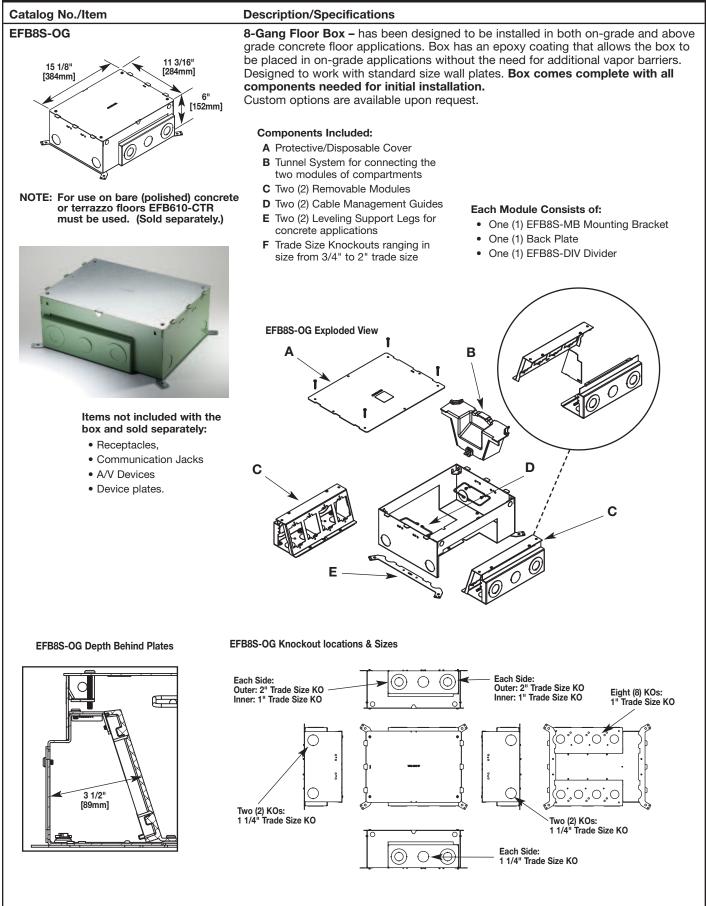


### Evolution Series EFB8 Floor Box Ordering Information (continued)

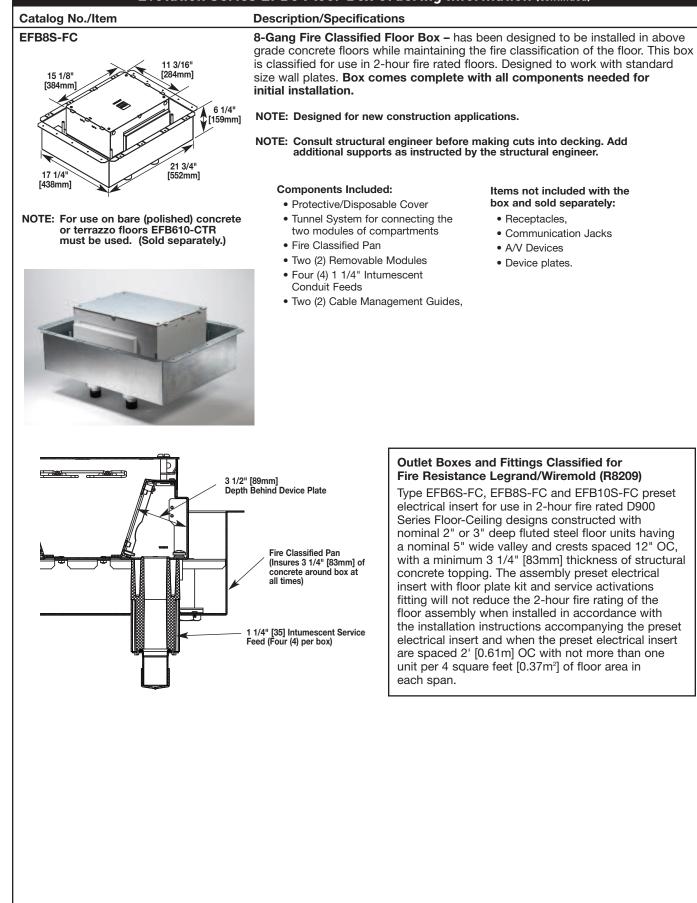


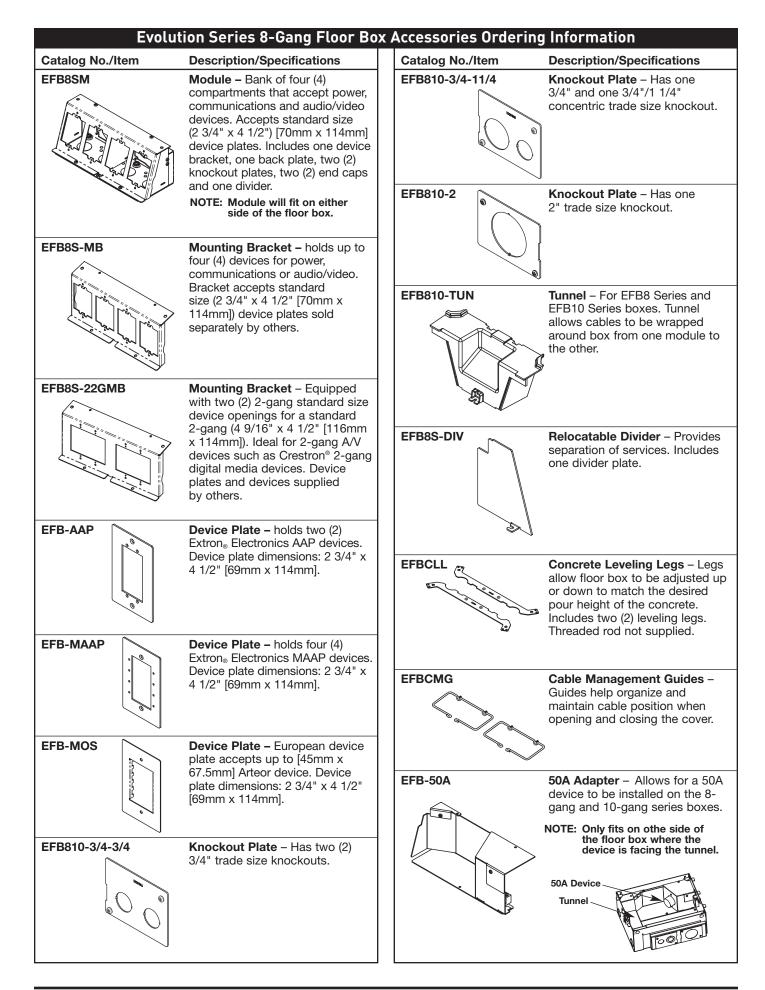

### **Evolution Series EFB10 Floor Box Ordering Information**

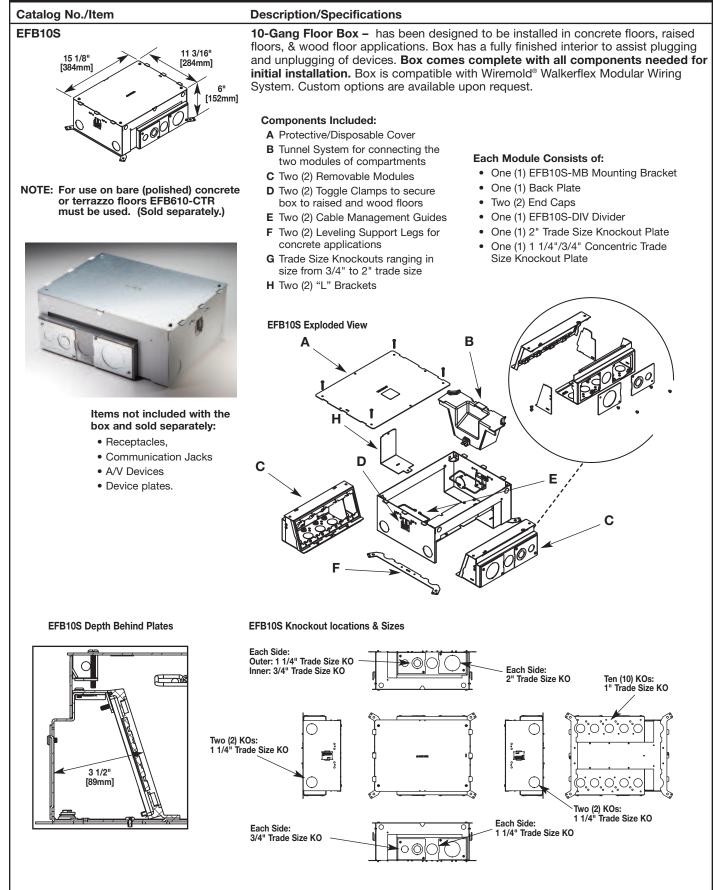



### **Evolution Series EFB10 Floor Box Ordering Information**

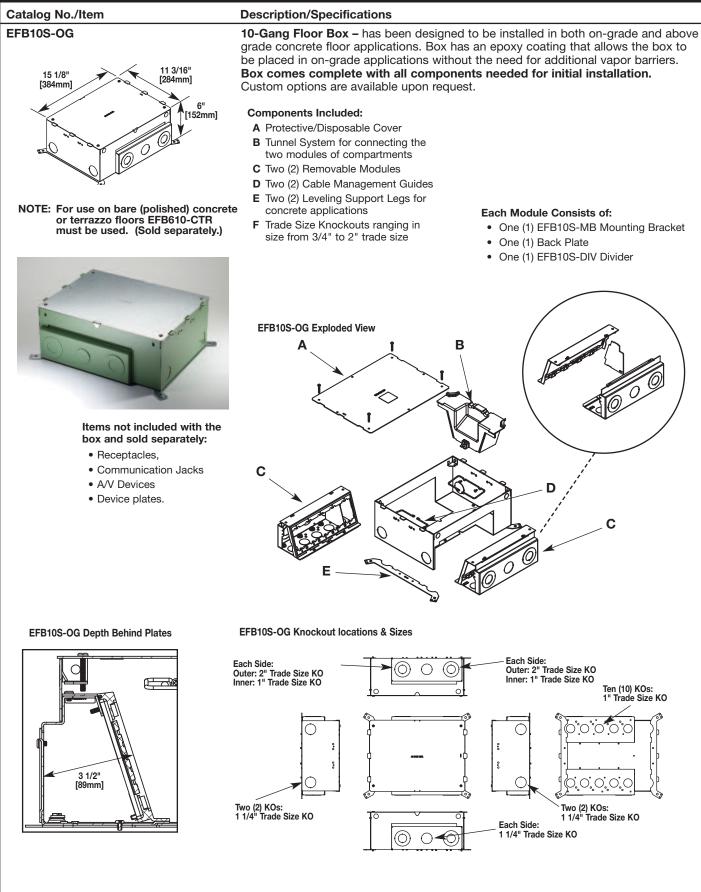

#### Evolution Series EFB10 Floor Box Ordering Information (continued) Catalog No./Item **Description/Specifications** EFB10S-FC 10-Gang Fire Classified Floor Box - has been designed to be installed in above grade concrete floors while maintaining the fire classification of the floor. This box is 11 3/16' 15 1/8" [284mm] classified for use in 2-hour fire rated floors. Box comes complete with all [384mm] components needed for initial installation. 6 1/4" [159mm] **Components Included:** Items not included with the box and sold separately: Protective/Disposable Cover • Tunnel System for connecting the · Receptacles, two modules of compartments Communication Jacks 21 3/4 17 1/4 [552mm] · Fire Classified Pan • A/V Devices [438mm] • Two (2) Removable Modules • Device plates. • Four (4) 1 1/4" Intumescent NOTE: For use on bare (polished) concrete **Conduit Feeds** or terrazzo floors EFB610-CTR must be used. (Sold separately.) • Two (2) Cable Management Guides, NOTE: Designed for new construction applications. NOTE: Consult structural engineer before making cuts into decking. Add additional supports as instructed by the structural engineer. **Outlet Boxes and Fittings Classified for** Fire Resistance Legrand/Wiremold (R8209) 3 1/2" [89mm] Depth Behind Device Plate Type EFB6S-FC, EFB8S-FC and EFB10S-FC preset electrical insert for use in 2-hour fire rated D900 Series Floor-Ceiling designs constructed with nominal 2" or 3" deep fluted steel floor units having a nominal 5" wide valley and crests spaced 12" OC, Fire Classified Pan with a minimum 3 1/4" [83mm] thickness of structural (Insures 3 1/4" [83mm] of concrete around box at concrete topping. The assembly preset electrical all times) insert with floor plate kit and service activations fitting will not reduce the 2-hour fire rating of the floor assembly when installed in accordance with the installation instructions accompanying the preset 1 1/4" [35] Intumescent Service Feed (Four (4) per box) electrical insert and when the preset electrical insert are spaced 2' [0.61m] OC with not more than one unit per 4 square feet [0.37m<sup>2</sup>] of floor area in each span.

Evoluti	ion Series 10-Gang Floor Bo	x Accessories Order	ring Information
Catalog No./Item	Description/Specifications	Catalog No./Item	<b>Description/Specifications</b>
EFB8S-23GMB	Mounting Bracket – Equipped with one 2-gang standard size device opening and one 3-gang standard size device opening. Accepts a standard 2-gang (4 9/16" x 4 1/2" [116mm x 114mm]) and a 3-gang (6 3/8" x 4 1/2" [162mm x 114mm]) device plate. Ideal for 2-gang A/V	EFB10-S1	Knockout Plate – Single receptacle 1.39" [35mm]. diameter. Device plate dimensions: 2.3" x 4.652" [58mm x 118mm].
	devices such as Crestron <sup>®</sup> 2-gang and 3-gang digital media devices. Device plates and devices supplied by others.	EFB10-S2	Knockout Plate – Single receptacle 1.59" [40mm]. diameter. Device plate dimensions: 2.3" x 4.652" [58mm x 118mm].
EFB10SM	Module – Bank of five (5) compartments that accept power, communications and audio/video devices. Accepts EFB10 Series device plates (2 1/32" x 4 5/8") [58mm x 117mm]. Includes one mounting bracket, one back plate,	0	
	nounting bracket, one back plate, one divider, two (2) end caps and two (2) knockout plates. Device plates sold separately. NOTE: Module will fit on either side of the floor box.	EFB10-6AB	Device Plate – Accepts up to three (3) dual Wiremold Open System communication adapters. Adapters sold separately. Device plate dimensions: 2.3" x 4.652" [58mm x 118mm].
EFB10S-MB	Mounting Bracket – hold up to five (5) devices for power, communications or audio/video. Bracket accepts EFB10 Series		
	device plates (2 1/32" x 4 5/8") [58mm x 117mm] device plates sold separately.	EFB10-3S2	<b>Device Plate</b> – Accepts up to three (3) Ortronics <sup>®</sup> Series II devices. Ortronics <sup>®</sup> devices sold separately. Device plate dimensions: 2.3" x 4.652" [58mm x 118mm].
EFB10-B	<b>Device Plate –</b> Blank device plate. Device plate dimensions: 2.3" x 4.652" [58mm x 118mm].	0	
e		EFB10-2C	Device Plate – Accepts one dual Wiremold Open System adapter, or one Ortronics <sup>®</sup> Series II adapter, or one Ortronics <sup>®</sup> TracJack adapter. Adapters sold
EFB10-DP	<b>Device Plate</b> – Duplex device plate. Device plate dimensions: 2.3" x 4.652" [58mm x 118mm].	0	separately. Device plate dimensions: 2.3" x 4.652" [58mm x 118mm].
		EFB10-AAP	<b>Device Plate</b> – holds two (2) Extron <sub>®</sub> Electronics AAP devices. Device plate dimensions: 2.3" x
EFB10-DEC	<b>Device Plate</b> – Decorator style device plate. For use with decorator style receptacles, GFCI receptacle, and decorator style audio/video devices. Device plate dimensions: 2.3" x 4.652" [58mm x 118mm].	0	4.652" [58mm x 118mm].

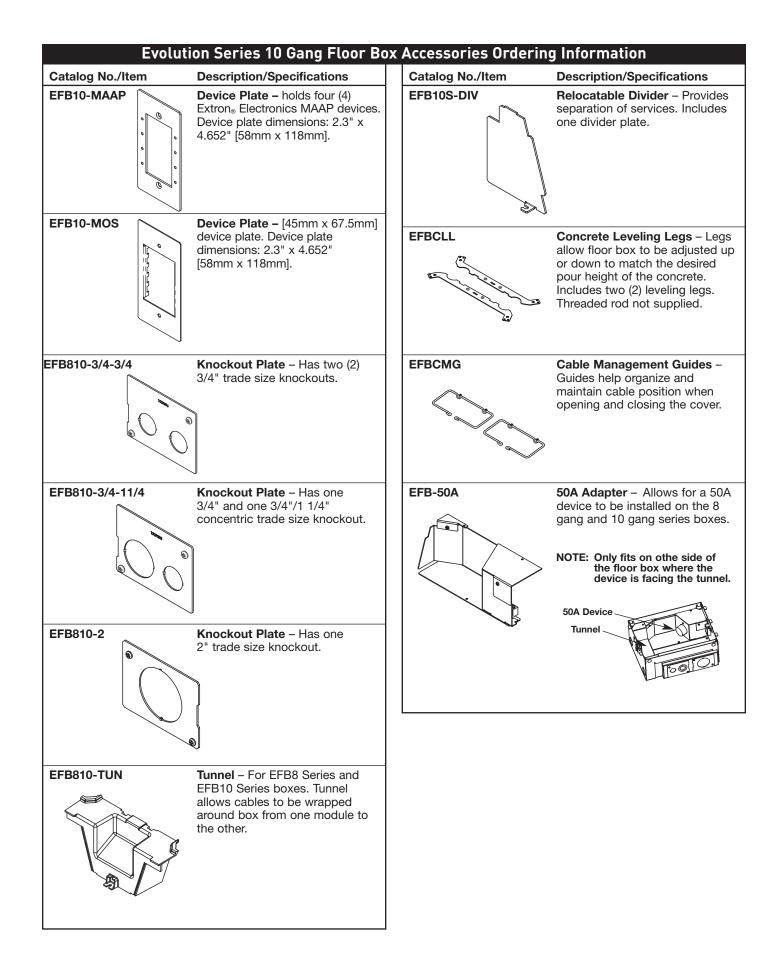

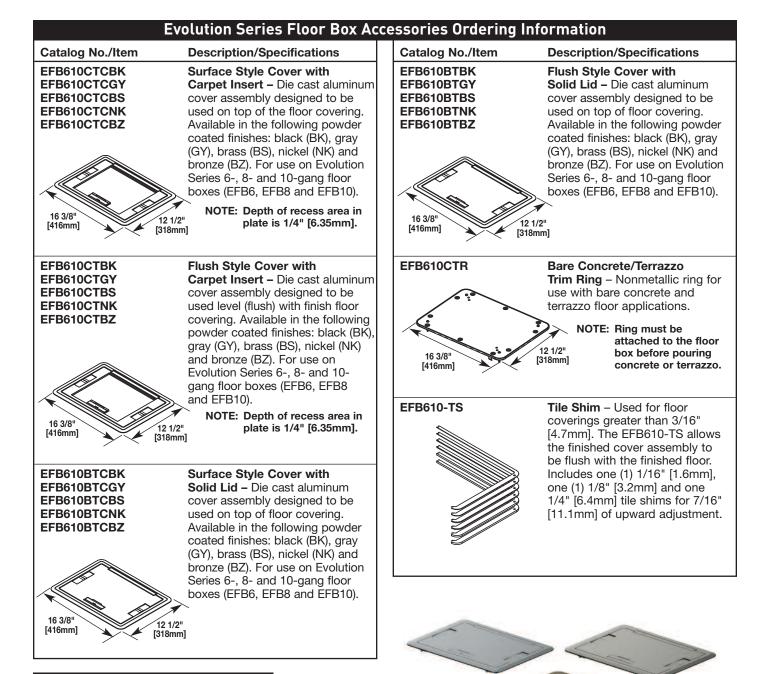


Load Capacities for Evolution Series Floor Box Cover Assemblies				
CATALOG NUMBERS	MAXIMUM LOAD IN POUNDS			
EFB610BTC Series	1800			
EFB610CTC Series	1800			
EFB610BT Series	1800			
EFB610CT Series	1800			

NOTE: Load applied through a 3" [76mm] mandrel in center of the cover. Loads above are static loads only and do not pertain to rolling loads.



Evolution Series Floor Box Covers are available in powder coated finishes of: (L to R) gray, nickel, bronze, brass and black.

### **Evolution Series EFBFF Furniture Feed Floor Box Ordering Information**

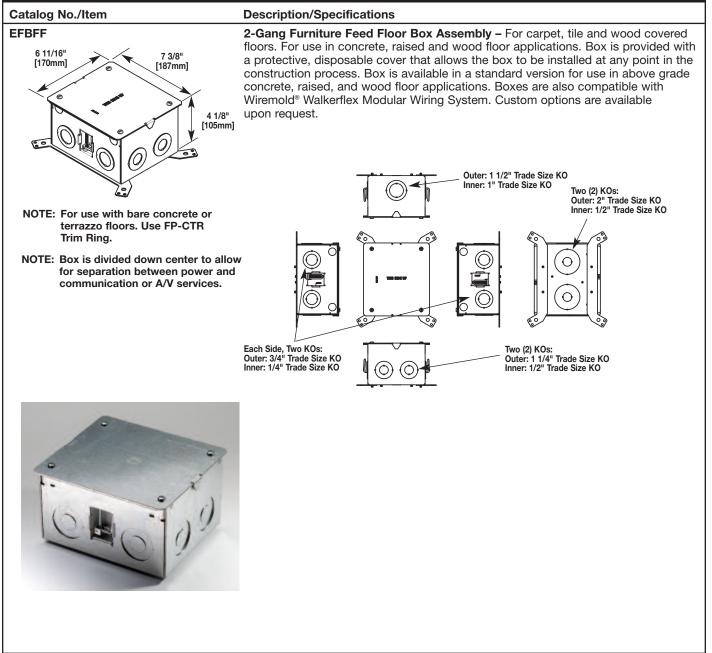

### **Evolution Series EFBFF Furniture Feed Floor Box Ordering Information**


Catalog No./Item

6 11/16" [170mm]

**EFBFF-OG** 

**Description/Specifications** 2-Gang Furniture Feed Floor Box Assembly - For carpet, tile and wood covered floors. For use in on-grade and above grade concrete floor applications. Box is provided with a protective, disposable cover that allows the box to be installed at any point in the construction process. Box is available with an epoxy coating for 7 3/8" [187mm] on-grade applications. Custom options are available upon request. 4 1/8" [105mm] 6 6 Outer: 1 1/2" Trade Size KO Inner: 1" Trade Size KO Two (2) KOs: Outer: 2" Trade Size KO Inner: 1/2" Trade Size KO NOTE: For use with bare concrete or terrazzo floors. Use FP-CTR Trim Ring. NOTE: Box is divided down center to allow  $(\bigcirc$ Ο for separation between power and communication or A/V services. Ο 60 Each Side, Two KOs: Outer: 3/4" Trade Size KO Inner: 1/4" Trade Size KO Two (2) KOs: Outer: 1 1/4" Trade Size KO Inner: 1/2" Trade Size KO O (C



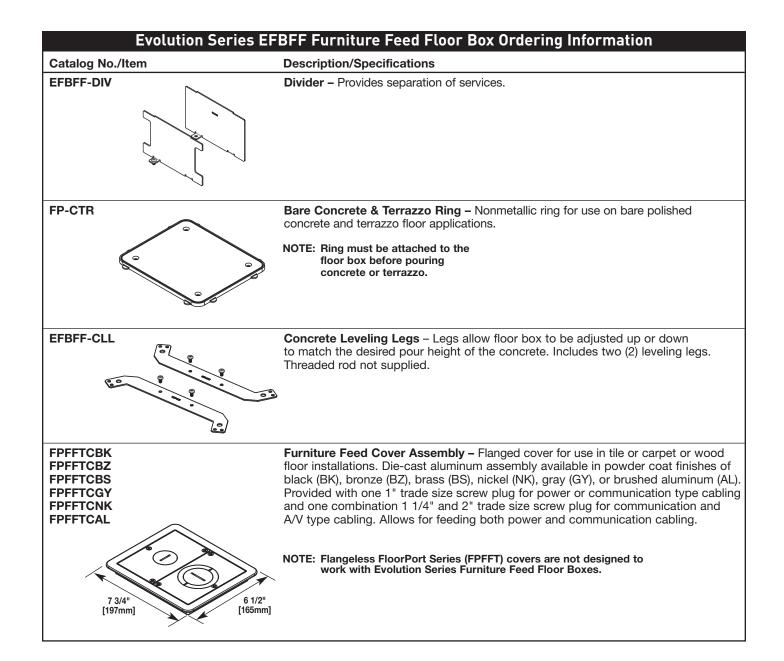



60 Woodlawn Street West Hartford, CT 06110 Phone: 1.877.BY.LEGRAND (295-3472) www.legrand.us/wiremold 570 Applewood Crescent Vaughan, Ontario L4K 4B4 Phone: 905.738.9195